

# Apparel Online

BANGLADESH

JUNE 2015 • PAGES 68

**EFFICIENT  
RESOURCE  
UTILIZATION  
MAKES A  
FACTORY  
SUSTAINABLE**


Wilson Design Source Supply  
to move up the value chain

Tex Zippers to grow by 45%  
with upcoming factory

Ananta Garments focusing on  
diversification for value addition


## 1010V4 DCS

AUTOMATIC BACK POCKET DECORATIVE UNIT

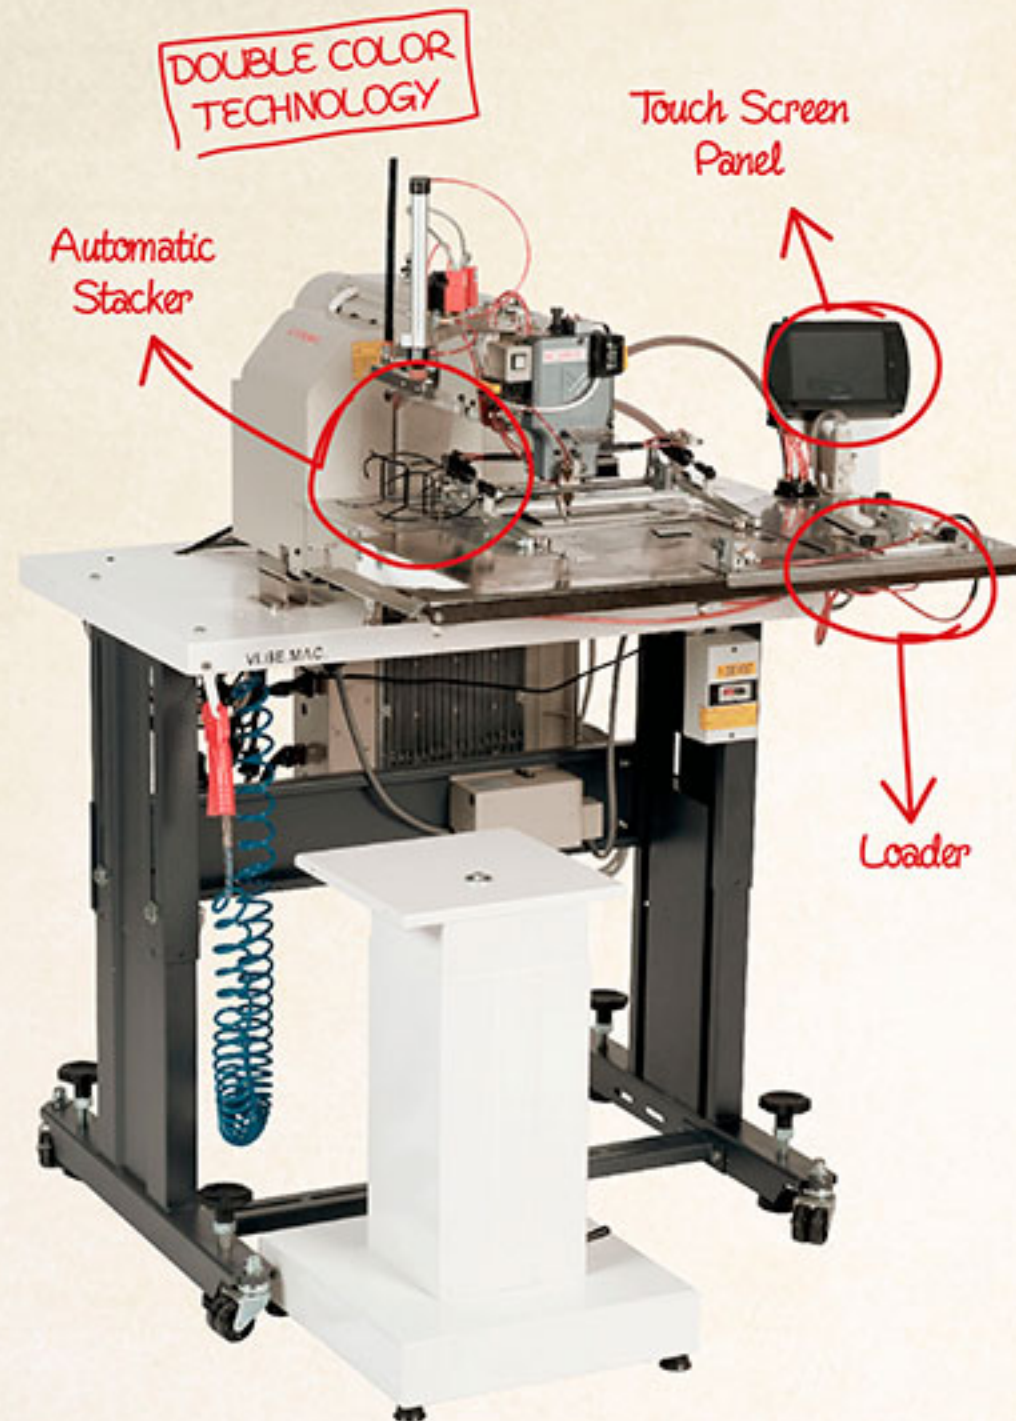

+25% productivity thanks to loader & stacker

Widest range of shapes embroidery on the market!!

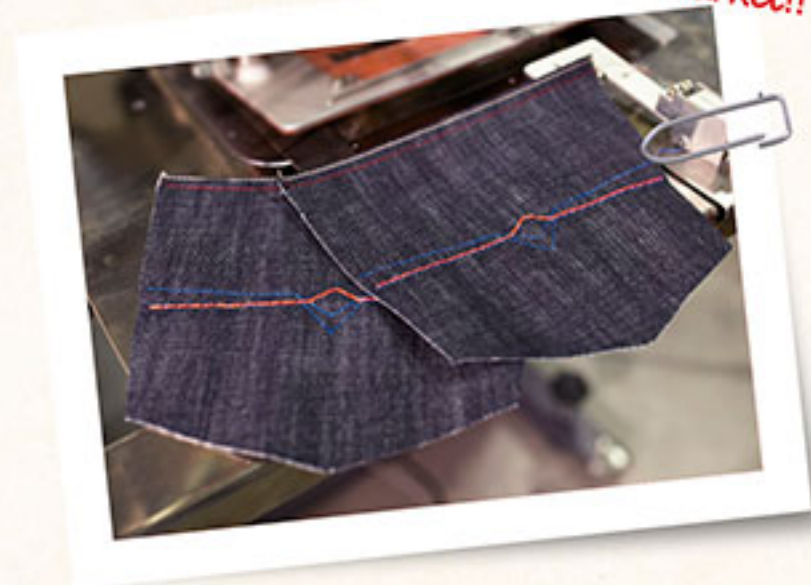

### SPECIFICATIONS

- ✓ Max Sewing Area: 258 X 158 mm
- ✓ Clamp Sewing Area: 245 X 145 mm
- ✓ Stitching Length: from 0,1 to 20 min (0,1 Step)
- ✓ Max Sewing Speed: 2800 rpm (single needle version) 2500 rpm (double needle version)
- ✓ Time Required To Change Clamps / Moulds: 3 min
- ✓ Average Pocket Embroidery Time: 6 secs



Thanks to all those who came to join us @  
**texprocess** Frankfurt.  
Let's see you next year @ Atlanta, USA!

stay connected




VI.BE.MAC. spa: Via Monte Pastello 7/i - 37057 S. Giovanni Lupatoto (VR) Italy - tel. +39 045 8778151/52 fax. +39 045 8779024  
vibemac@vibemac.com - www.vibemac.com

VBM Bangladesh: house no #76, Gawsul Azam Avenue, Sector #13, Uttara, 1230 Dhaka, Bangladesh - office.m@vbm-bd.com


Vibemac's dealer in Bangladesh Oubari Group: warehouse no A3-22 - P.O.BOX 8139, Saif Zone, Sharjah, UAE

## 2261 HP

3 NEEDLE CHAIN STITCH FEED OF THE ARM UNIT

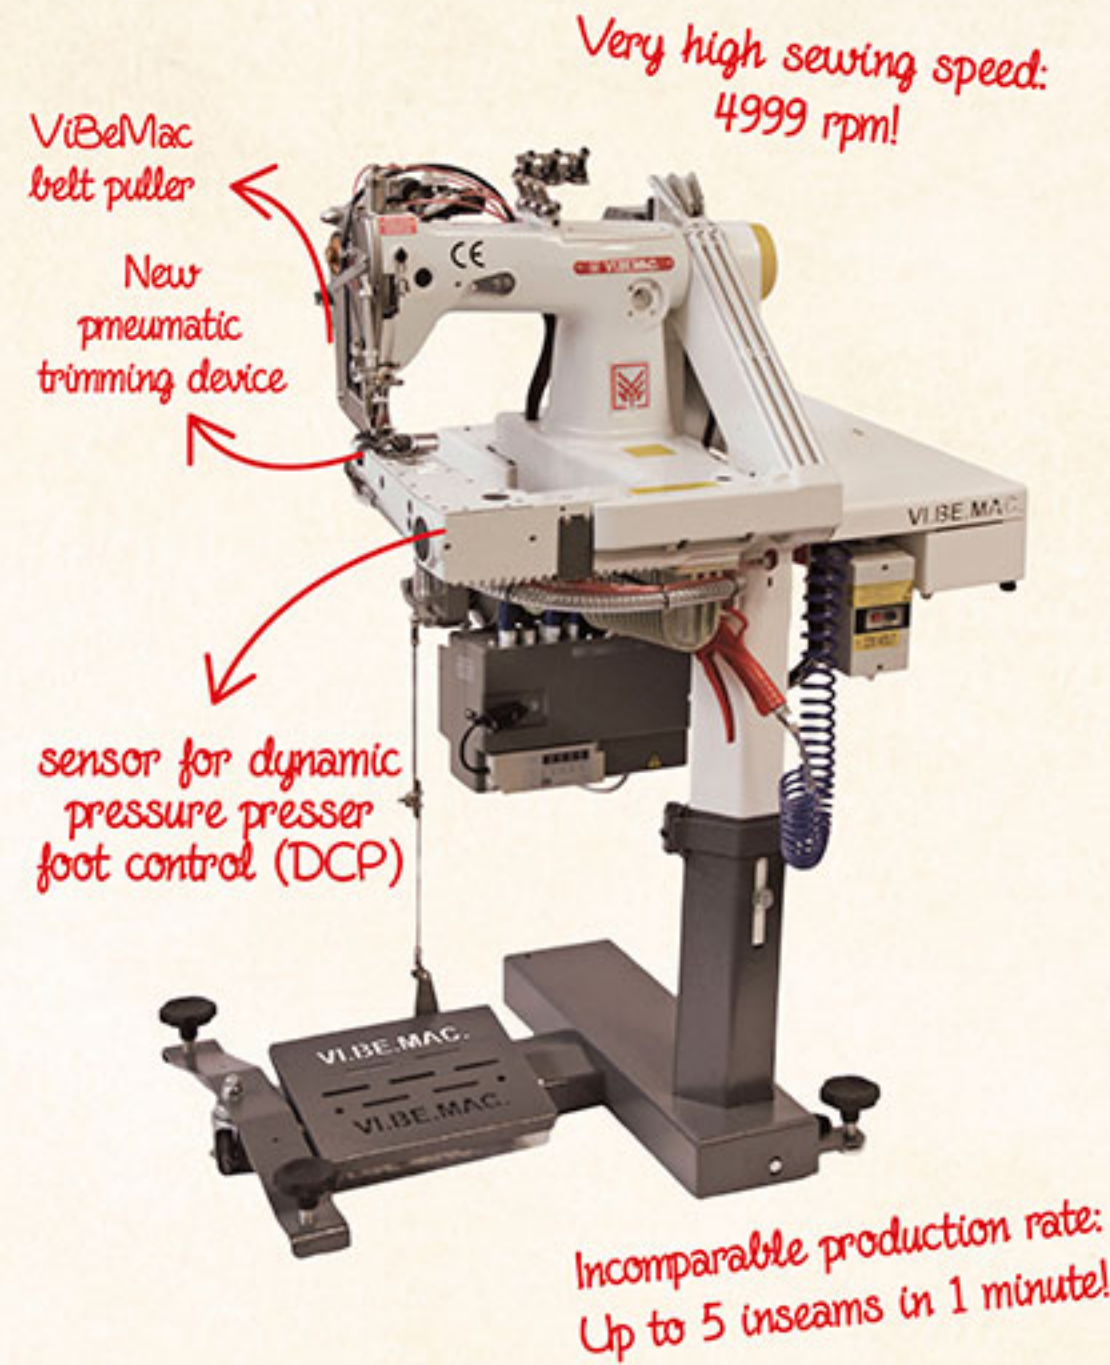

Incomparable production rate:  
Up to 5 inseams in 1 minute!

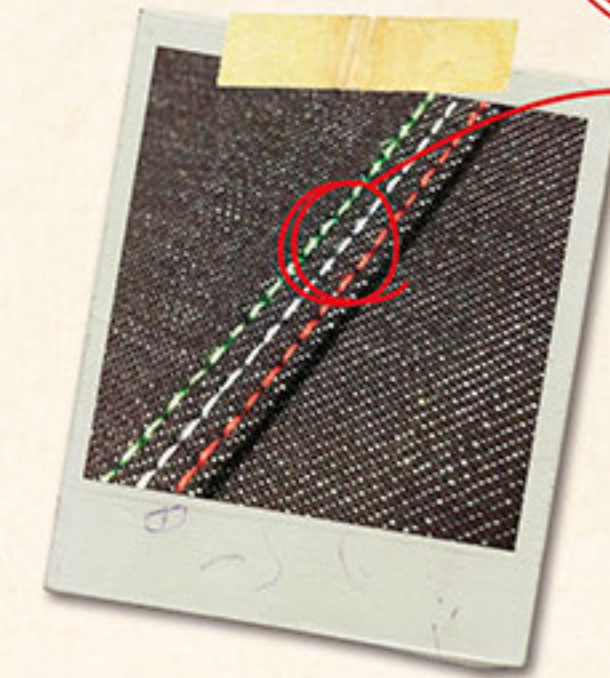

Constant stitching length thanks to puller & DCP system

### SPECIFICATIONS

- ✓ Max Sewing Speed: 4999 rpm
- ✓ Stitching Length: from 0,9 to 4,5 mm
- ✓ Standard Needle Gauge: 1/4" (6,4 mm)
- ✓ Optional Needle Gauge: 9/32" (7,2 mm) 3/8" (9,6 mm) - 1/4" + 1/8" (MIX 9,6 mm) 3/16" (4,8 mm) 2 needles - 5/16" (7,9 mm)
- ✓ Sewing Head: Vi.Be.Mac. 3 needle chain stitch

## 2262 HP

3 NEEDLE REVERSE LAP FEED OF THE ARM UNIT

### SPECIFICATIONS

- ✓ Max Sewing Speed: 4000 rpm
- ✓ Stitching Length: from 2,1 to 4,2 mm
- ✓ Standard Needle Gauge: 1/4" (6,4 mm)
- ✓ Optional Needle Gauge: 9/32" (7,2 mm)

