

V700

**2 NEEDLE CHAIN STITCH
AUTOMATIC BACK POCKET
HEMMING UNIT**



▶ video & more >



VI.BE.MAC.

2 NEEDLE CHAIN STITCH AUTOMATIC BACK POCKET HEMMING UNIT V700




EFFICIENCY



QUALITY



EASY HANDLING

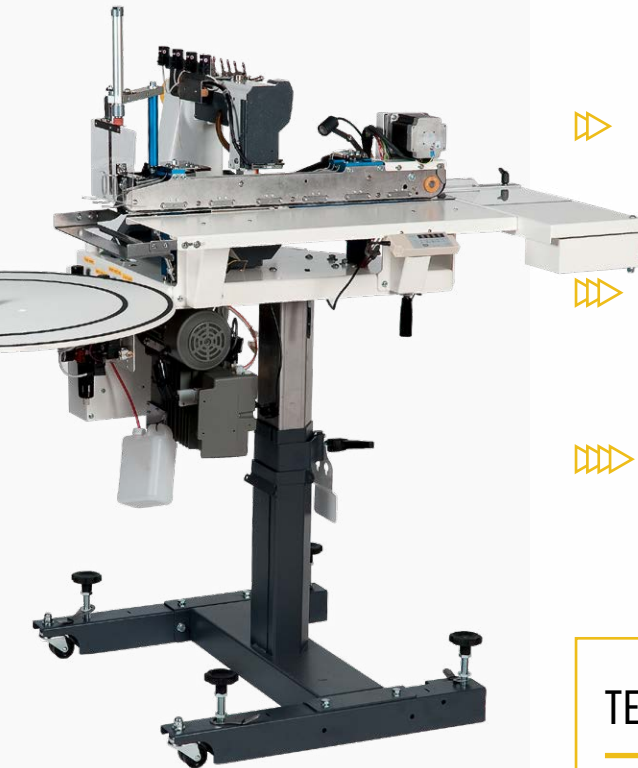

The automatic pocket hemming unit V700, 2 needle chain stitch is a flexible unit with a high level of efficiency and quality output. One unit can supply more sewing lines, following the concept of modular production and space maximization.

The unit can perform an average production of 1800 up to 2000 pockets per hour. The innovative transport system allows the units to perform on many kind of fabric thickness from workwear to denim and stretch materials.

▷ INNOVATIVE PNEUMATIC SYSTEM (PATENTED)

High productivity with no more wave effect or hem arching problems on denim fabric

▷ ADJUSTABLE BELT AND FOLDER

Both the devices can be adjusted according to fabric thickness for cost saving and easy setup on different styles

▷▷ PROGRAMMABLE CUT

The automatic cut at beginning and at the end is programmable with a specific control panel

▷▷▷ ROTATING STORAGE DISK

The disk can contain up to 600 pocket and while unit is working the disk full of pockets can be replaced in 5 seconds with an empty one (supplied optionally)

TECHNICAL SPECIFICATIONS

Sewing Head: Vi.Be.Mac. 2 needle CS

Sewing Speed: 3600 rpm

Stitch Length: 0.9 - 5 mm


Control Box: XCG MFY 2005

Sewing Machine Motor:

Mitsubishi XCG 554 20Y - 550 W

Power Supply Voltage: 220 V 50/60 Hz

Air Consumption: 3 L/min

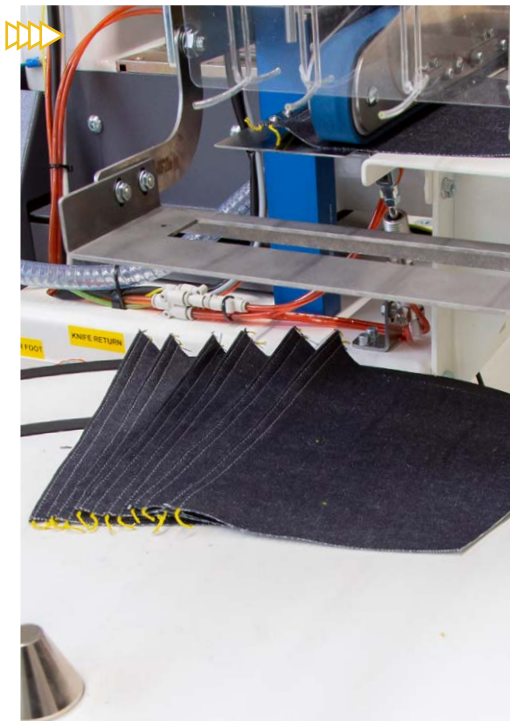

NEEDLE GAUGES


- ✓ Standard needle gauge: 1/4" (6.4 mm)
- ✓ Optional needle gauges (2 needles): 3/16" (4.8 mm) - 9/32" (7.2 mm) - 3/8" (9.5 mm)
- ✓ Optional needle gauge (3 needles): 1/2" (12.7 mm)

FEATURES


- › Air compressed economizer working ONLY when chain cutter is activated
- › Pneumatic traction control on the feeding belt (PATENTED)
- › Stacker
- › Thread breakage sensor
- › Automatic thread trimmer
- › One leg adjustable stand
- › Innovative pneumatic transport system (PATENTED)
- › Control panel to adjust chains at beginning and end of the pocket
- › Easy maintenance and setup of the unit

OPTIONAL


- Manual label insertion device
- Conversion kit for 1 needle
- Second storage disk








2 needle
chain stitch




1 needle
chain stitch
/ 1 needle
lockstitch




coin pocket

COMPARISON	V700	V701	V702
 speed	3600 rpm	2400 rpm	3600 rpm
 sewing head	Vibemac 2 CS	Vibemac 2 LS	Yamato 3 CS
 pockets per hour	1800/ 2000	1500/ 1800	1800/ 2000
 stitch length	0.9 - 5 mm	2 - 4.5 mm	0.9 - 4.5 mm
 optional needle gauges	3/16" 9/32" 3/8" 1/2" (3 needle)	1/8" 5/32" 3/16" 7/32" 9/32" 5/16" 3/8" 1/2"	/

GET IN TOUCH



FOLLOW OUR SOCIALS

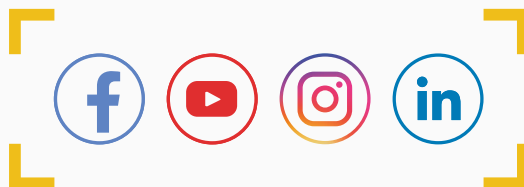

VI.BE.MAC.

vbm 

VI.BE.MAC. S.p.A.

Società soggetta a direzione e coordinamento di Jack Europe S.à.r.l.

Via Monte Pastello, 7/i - 37057 San Giovanni Lupatoto (VR), Italy

vibemac@vbm-grp.com - sales@vbm-grp.com - customercare@vbm-grp.com

Tel. [+39 045 8778151](tel:+390458778151) / [8778152](tel:+390458778152)



www.vibemac.com

